



Varilla Corrugada

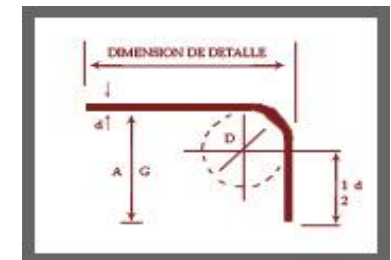

| Limite de frecuencia minimo 44220 kg/cm ² | | | | | | | Resistencia a la tension 6330 kgs/cm ² | | | | | |
|---|------------------|--------|------------------|-------------|--------------|----------------|--|-------|-----|---------|---------------|---------|
| Dimensiones y Pesos | | | | | | | Ganchos a 180° | | | | Ganchos a 90° | |
| Varilla No. | Diámetro Nominal | | Perímetro mm. | Área cm. | Peso kg/m | Piezas ton. | A o G | | J | | A o G | |
| | mm. | pulg. | | | | | cm. | pulg. | cm. | pulg. | cm. | pulg. |
| 2.5 | 7.9 | 5/16" | 24.8 | 0.49 | 0.384 | 212 ± 7 | 13 | 5" | 6 | 2 1/2" | 13 | 5" |
| 3 | 9.5 | 3/8" | 29.8 | 0.71 | 0.557 | 149 ± 4 | 13 | 5" | 8 | 3" | 15 | 6" |
| 4 | 12.7 | 1/2" | 39.9 | 1.27 | 0.996 | 84 ± 2 | 15 | 6" | 10 | 4" | 20 | 8" |
| 5 | 15.9 | 5/8" | 50 | 1.99 | 1.56 | 54 ± 1 | 18 | 7" | 13 | 5" | 26 | 10" |
| 6 | 19.1 | 3/4" | 60 | 2.87 | 2.25 | 37 ± 1 | 20 | 8" | 15 | 6" | 31 | 12" |
| 8 | 25.4 | 1" | 79.8 | 5.07 | 3.975 | 21 | 28 | 11" | 20 | 8" | 41 | 16" |
| 10 | 31.8 | 1 1/4" | 99.9 | 7.94 | 6.225 | 13 | 43 | 17" | 32 | 12 1/2" | 54 | 21 1/2" |
| 12 | 38.1 | 1 1/2" | 119.7 | 11.4 | 8.938 | 9 | 60 | 18" | 46 | 23 3/4" | 69 | 27" |

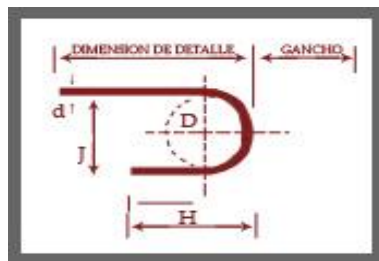